

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Image Problem Mailbox.**



PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application Of:)	
Mauri KANGAS et al.)	Group Art Unit: Unassigned
Serial No.: 10/801,613)	Examiner: Unassigned
Filed: March 17, 2004)	Atty. Dkt. No. 004770.00195
For: TRANSMISSION OF DATA USING A)	
DATA CAROUSEL)	


SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450
Sir:

Submitted herewith is a certified copy of United Kingdom Patent Application No.: 0306558.8 filed in United Kingdom March 21, 2003. This application is the basis for Applicant's claim for priority, which claim was made upon filing of the parent patent application on March 17, 2004.

Please charge any fee associated with the filing of this paper to our Deposit Account No. 19-0733.

Respectfully submitted,
BANNER & WITCOFF, LTD.

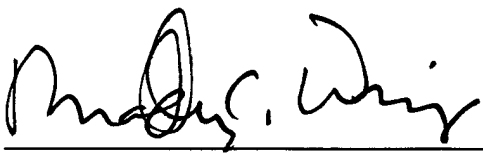By: 
Bradley C. Wright
Registration No. 38,061

Eleventh Floor
1001 G Street, N.W.
Washington, D.C. 20001-4597
(202) 824-3000
Dated: April 29, 2004

THIS PAGE BLANK (USPTO)



INVESTOR IN PEOPLE

The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ


USA

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation and Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein together with the Statement of inventorship and of right to grant of a Patent (Form 7/77), which was subsequently filed.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

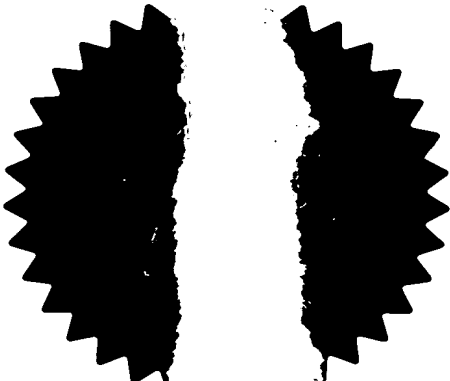

Signed *Stephen Hordley*

Dated 26 March 2004

THIS PAGE BLANK (USPTO)

Patents Form 7/77

Patents Act 1977
(Rule 15)

The
Patent
Office

Office
21.3.03

C14

Statement of inventorship and
of right to grant of a patent



7/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference MCR/42341GB1

2. Patent application number 0306558.8

3. Full name, address and post code of the or
each applicant Nokia Corporation
Keilalahdentie 4
Espoo 02150
Finland

Patents ADP number

If the applicant is a corporate body, give the
country/state of its incorporation FINLAND

1872FD4 B158933-2 002094
P07/7700 0.00-0306558.8 NONE

4. Title of the invention Transmission of data using a data carousel

5. State how the applicant(s) derived the right
from the inventor(s) to be granted a patent By virtue of employment under Section 7(2)(b) of the
Patents Act 1977

6. How many, if any, additional Patents Forms
7/77 are attached to this form?

7. I/We believe that the persons named over the page (and on any extra
copies of this form) is/are the inventor(s) of the invention which the
above patent application relates to.

Signature

Vener, Shylyko

Date

17 March 2004

8. Name and daytime telephone number of
person to contact in the United Kingdom Matthew Read
020 7600 4212

THIS PAGE BLANK (USPTO)

Patents Form 7/77

Enter the full names, addresses and postcodes of the inventors in the boxes and underline the surnames

Mauri KANGAS
Sporentie 21,
21530 Paimio
Finland

Patents ADP number

8817955001

Ari IKONEN
Kaivokuja 12
21280 Raisio
Finland

Patents ADP number

8664260001

Patents ADP number

THIS PAGE BLANK (USPTO)

Request for grant of a patent



1/77

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1.	Your reference	MCR/42341GB1		
2.	Patent application number	21 MAR 2003	0306558.8	
3.	Full name, address and post code of the or each applicant	Nokia Corporation Keilalahdentie 4 Espoo 02150 Finland		
	Patents ADP number	7652217003		
	If the applicant is a corporate body, give the country/state of its incorporation	Finland		
4.	Title of the invention	Transmission of data using a data carousel		
5.	Name of your agent	VENNER, SHIPLEY & CO		
	"Address for service" in the United Kingdom to which all correspondence should be sent	20 LITTLE BRITAIN LONDON EC1A 7DH		
	Patents ADP	1669004		
6.	If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or each of these earlier applications and the or each application number	Country	Priority application number	Date of filing
7.	If this application is divided or otherwise derived from an earlier UK application, give the number and filing date of the earlier application	Number of earlier application		Date of Filing

Patents Form 1/77

8. is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'YES' if:
a) any applicant in 3. above is not an inventor, or
b) there is an inventor who is not named as an applicant, or
c) any named applicant is a corporate body)
- YES


9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description 14

Claim(s) 8

Abstract 1

Drawing(s) 3 + 3 

10. If you are also filing any of the following state how many against each item.

Priority documents N/A

Translations of priority documents N/A

Statement of inventorship and right to grant of a patent (Patents Form 7/77) 1

Request for preliminary examination and search (Patents Form 9/77) 1


Request for substantive examination (Patents Form 10/77)

Any other documents

11. I/We request the grant of a patent on the basis of this application.

Signature

Date



21 March 2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Matthew Read
020 7600 4212

Transmission of data using a data carousel

Description

The invention relates to the transmission and reception of data in a communication system and is particularly suitable for, but not limited to, Digital Video Broadcast (DVB) transmissions using satellite, cable or terrestrial networks.

Many of the data delivery mechanisms associated with digital broadcasting lend themselves to the provision of interactive services. The reliability of broadcast transmissions may be enhanced by using a session protocol that repeatedly broadcasts a set of data packets in order to ensure that they are received by one or more receivers.

One mechanism that can be used for repeated broadcasts is a DVB data carousel, as defined in European Telecommunications Standards Institute, European Standard (Telecommunications Series) EN 301 192, European Broadcasting Union, France 1999. The application data is encapsulated in a data packet, for example as a datagram section conforming to the Digital Storage Media Command and Control (DSM-CC) standard defined in International Organisation for Standardization ISO/IEC 13818-6, ISO Publications, Geneva, Switzerland, 1998 and mapped onto MPEG-2 transport packets according to ISO/IEC 13818-1, ISO Publications, Geneva, Switzerland, 2000. The transport packets are arranged into modules and blocks, forming groups of transport packets within the data carousel. The data carousel transmits the groups of transport packets cyclically, so that each group is periodically re-transmitted.

The receiver filters the incoming data to ensure that only messages intended for that receiver are made available for access by its user. Filtering may be implemented using software that continuously monitors the incoming transport stream. For example, the receiver may have a key assigned to it, which is used by an associated processor to decrypt all incoming messages. If the message is encrypted according to the key assigned to its intended receiver, the receiver can filter incoming data by disregarding any messages that it cannot successfully decrypt. In the case of data

delivery using a data carousel mechanism, the message is encrypted by scrambling the transport packet. An MPEG-2 transport packet contains a field for indicating a scrambling control mode used so that the receiving device can decrypt it accordingly. However, this method places an additional strain on filtering mechanisms, as it is necessary to decrypt the entire transport packet before it can be determined whether or not the data is addressed to that receiver. For this reason, the filtering process can be quite slow, comparing unfavourably with hardware based filtering methods used in other broadcasting systems.

10 According to a first aspect of the invention, a method of transmitting data in a digital broadband communication network comprises encapsulating the data according to a first protocol to produce a data packet, mapping the data packet onto a transport packet, encoding filtering information in a filtering field included in the transport packet and repeatedly transmitting the transport packet using a data
15 carousel mechanism.

This aspect also provides a computer program containing program instructions for configuring a processor to perform such a method.

20 This method of transmitting data allows the use of hardware based filtering methods in a receiving device for screening data received from a data carousel for example a DVB carousel. As such methods do not require continuous processing and monitoring of incoming data, they are generally faster than those using software based filters. Therefore, the invention can potentially increase the
25 efficiency of data reception in a receiving device.

Where the filtering information relates to an address of a recipient, it may be the whole or part of an individual or group address. The address may be in the form of an IP or Media Access Control (MAC) address.

30 Information indicating a payload scrambling control mode may also be included in the transport packet. In particular, where data is encapsulated according to the DSM-CC datagram section format defined in ISO/IEC 13818-6, the resulting data

packet includes two reserved bits. When the data packet is mapped onto the transport packet, the payload scrambling mode may be indicated using these two bits.

- 5 The location of the filtering information and optional payload scrambling control mode information within the structure of the transport packet is not important. However, it is advantageous for such information to be located at positions equivalent to those in transport packets carrying data encapsulated according to other protocols, so that the filtering processes performed by a receiving device may
10 be compatible with two or more types of data packet. For example, the position of the filtering information and/or the optional payload scrambling information may match those in a transport packet carrying a Digital Video Broadcast Multiprotocol Encapsulation (DVB-MPE) data packet as defined in ISO/IEC 13818-6, the filtering information in this case being a 4 byte MAC address and located
15 immediately before a DSM-CC Download Data Header.

According to a second aspect of the invention, an apparatus comprises a processor configured to receive data from a source, encapsulate the data to produce a data packet according to a protocol, map the data packet onto a transport packet, encode
20 filtering information in a filtering field included in the transport packet and repeatedly transmit the transport packet using a data carousel mechanism.

This aspect further provides a communication system comprising such an apparatus, along with a DVB network and one or more receiving devices.

25 According to a third aspect of the invention, a transport packet comprises a header containing an identifier corresponding to a data carousel mechanism, a payload comprising data to be transmitted to one or more users of one or more receiving devices and a filtering field containing filtering information relating to said one or
30 more receiving devices.

According to a fourth aspect of the invention, a method of transmitting data in a digital broadband communication network comprises encapsulating the data

according to a first protocol to produce a data packet, mapping the data packet onto a transport packet, incorporating within the transport packet payload scrambling control mode information relating to an encryption status of the data packet mapped onto said transport packet and repeatedly transmitting the transport packet using a data carousel mechanism.

This aspect also provides a computer program containing program instructions for configuring a processor to perform such a method.

10 This aspect of the invention allows encryption to be limited to a payload delivered using a data carousel mechanism, i.e. without scrambling the transport packet itself. As the filtering information is not scrambled, it is not necessary to perform a decryption process before filtering. This potentially increases the speed of the filtering process and allows the use of hardware filters for screening data
15 transmitted using a data carousel mechanism. This may also increase the efficiency of the data reception process, as the receiving device only decrypts information intended for its user.

The DSM-CC datagram section format defined in ISO/IEC 13818-6 includes two
20 reserved bits. The invention can be implemented so that, if the data packet is mapped onto the transport packet has been configured in accordance with this format, these reserved bits are used to indicate the scrambling control mode.

Alternatively, the scrambling control information may be located at a position in the
25 transport packet corresponding to the location of the equivalent information in a transport packet carrying a payload encapsulated according to another protocol, such as DVB-MPE.

The payload scrambling control mode may be indicated using a format in which a
30 first bit is used to indicate whether or not the data packet is scrambled. Where the data packet has been scrambled, a second bit may be used to indicate an encryption key that has been used.

According to a fifth aspect of the invention, an apparatus comprises a processor configured to receive data from a source, encapsulate the data according to a first protocol to produce a data packet, map the data packet onto a transport packet, incorporate within the transport packet payload scrambling control mode information relating to an encryption status of the data packet mapped onto said transport packet and repeatedly transmit the transport packet using a data carousel mechanism.

This aspect further provides a communication system comprising such an apparatus, along with a DVB network and one or more receiving devices.

According to a sixth aspect of the invention, a transport packet comprises a header containing an identifier relating to a DVB data carousel, a payload comprising data to be transmitted to one or more users of one or more receiving devices and a payload scrambling control mode field containing scrambling control mode information, said scrambling control mode information being unrelated to an encryption status of said header.

An embodiment of the invention will now be described, with reference to the accompanying drawings, in which:

Figure 1 depicts a communication system comprising a DVB data carousel;

Figure 2 depicts a transport stream packet according to a first embodiment of the present invention alongside a known transport stream packet in which data has been encoded according to a different protocol;

Figure 3 is a block diagram of a set top box in the communication system of Figure 1.

Referring to Figure 1, a mobile cellular telephone handset MS1 is in radio communication with a public land mobile network PLMN1 through a cellular radio link 2. In this example, the handset MS1 includes a digital camera that can take a photograph of scene SC1 – a girl running. The handset MS1 includes digital processing circuitry that converts the image from the camera into a Multimedia Messaging Service (MMS) message for transmission to an individual recipient or a

group of recipients in a manner well known *per se*. For example, the Nokia^(RTM) 7650 telephone handset can perform this function. The MMS message may be transmitted under the control of MMSC1 through PLMN1 to another handset MS2. Alternatively, a user of handset MS1 can associate a TCP/IP address with the MMS, so that the MMSC1 can forward the MMS image data to an IP address via the Internet 3, in the form of an email attachment. In this example, the MMS message may be routed to a personal computer PC1 connected to the Internet 3.

The MMS message may also be routed selectively via a DVB-T network 4 to one or more set top boxes STB1, STB2 for display on associated analogue TV receivers TV1, TV2. To this end, the MMS message is routed to a Digi-TV centre 5 that provides services through the DVB-T network 4. The Digi-TV centre 5 acts as a server for MMS messages, which includes a data carousel for repeated data transmissions, and has a store 6 to receive messages from the Internet 3.

The MMS image data is encapsulated in a data packet according to the DSM-CC datagram section format, according to the syntax shown in Table 1.

Syntax	No.of bits	Mnemonic
datagram_section() {		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
private_indicator	1	bslbf
reserved	2	uimsbf
dsmcc_section_length	12	uimsbf
table_id_extension	16	uimsbf
* reserved	2	bslbf
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
downloadMMSmessage()		
CRC_32	32	rpchof
}		

Table 1

The datagram section format includes a `table_id`, which depends on the type of message or data being encapsulated. In this case, the data is an MMS message and so the `table_id` has a value indicating that the datagram is a MMS message to be downloaded. The datagram section format also includes two reserved bits, indicated with an asterisk in Table 1.

The data packet may be scrambled, if required, before being mapped onto an MPEG-2 transport packet 7, as shown in Figure 2. The structure and syntax of the MPEG-2 transport packet 7 is shown in more detail in Table 2.

Syntax	No.of bits	Mnemonic
transport_packet () {		
sync_byte	8	bslbf
transport_error_indicator	1	bslbf
payload_unit_start_indicator	1	bslbf
transport_priority	1	bslbf
PID	13	uimsbf
transport_scrambling_control	2	bslbf
adaptation_field_control	2	bslbf
continuity_counter	4	uimsbf
pointer_field	8	uimsbf
start of the datagram_section() {		
table_id	8	uimsbf
section_syntax_indicator	1	bslbf
private_indicator	1	bslbf
reserved	2	uimsbf
dsmcc_section_length	12	uimsbf
table_id_extension	16	uimsbf
** payload_scrambling_control	2	bslbf
version_number	5	uimsbf
current_next_indicator	1	bslbf
section_number	8	uimsbf
last_section_number	8	uimsbf
filtering_field() {		
filtering_field or address_field		
}		
downloadMMSmessage() {		
for (I=0; I<N; I++) {		
data_byte of the downloadMMSmessage()		
}		
}		
CRC_32		
}		

Table 2

- 5 The transport packet contains a header 8, which includes a packet identifier (PID) associated with the data carousel, a bit 9 indicating the start of the payload unit and an 8-bit pointer 10, which points to a header 11 of the datagram.

Within the transport packet 7, the reserved bits from the original datagram, indicated by an asterisk in Table 1, are replaced with payload scrambling control bits (hereafter, PSCBs) 12, indicated by two asterisks in Table 2. These PSCBs represent the scrambling control mode of the payload, i.e. the datagram, as shown in Table 3.

Payload scrambling control bits	Scrambling mode
00	Encrypted using session key 1
01	Encrypted using session key 0
10	Reserved
11	Unscrambled

Table 3

In this example, if the first payload scrambling control bit is a '1', this indicates that the data has not been scrambled. However, where the first control bit is a '0', the second control bit indicates the scrambling control mode used.

The transport packet further includes a 32-bit field for filtering information 14, a header 15 associated with the MMS and the datagram 13 itself. The filtering information 14 is used by a set top box STB1 to determine whether or not received data is addressed to it, so that data that is not intended for a user of the set top box STB1 can be discarded. In this particular embodiment, the filtering information 14 is in the form of a MAC address of an individual receiving device STB1, or group of receiving devices, to which the MMS is directed. However, it is possible to use part of the MAC address or part or all of an IP address associated with the set top box STB1, depending on the broadcaster's requirements.

In this example, the location of the filtering information 14 in the DSM-CC datagram 13 corresponds to the location of the filtering information in an equivalent DVB-MPE datagram, although the location of the PSCMBs 12 differs. This is shown in Table 4, which compares the syntaces of these two formats.

DSM-CC datagram section	DVB-MPE datagram section	No.of bits
table_id	table_id	8
section_syntax_indicator	section_syntax_indicator	1
private_indicator	private_indicator	1
reserved	reserved	2
dsmcc_section_length	section_length	12
table_id_extension	MAC_address_6	8
table_id_extension	MAC_address_5	8
payload_scrambling_control	reserved	2
version_number (bit4, bit3)	payload_scrambling_control	2
version_number (bit2, bit1)	address_scrambling_control	2
version_number (bit0)	LLC_snap_flag	1
current_next_indicator	current_next_indicator	8
section_number	section_number	8
Address/ Filtering Field	MAC_address_3	8
Address/ Filtering Field	MAC_address_2	8
Address/ Filtering Field	MAC_address_1	8
Address/ Filtering Field	MAC_address_0	8

Table 4

Figure 2 shows a transport packet 16 containing fields 8' - 15', which contains the same MMS 13 as the transport packet 7 as an DVB-MPE encapsulated datagram 13'. The filtering information 14 in the transport packet 7 are located at the same position as the equivalent data 14' in a transport packet 16 in the form of the MAC address of the set top box STB1. This means that a software or hardware filter can screen both transport packets 7, 16 without requiring any modification relating to the different protocols used to encapsulate the MMS.

In addition, as the payload is scrambled independently of the transport packet 7, it is not necessary to unscramble the filtering information at this stage. Therefore, even where a software filter is used, the filtering process may proceed quickly and efficiently when compared with previous software filters for screening data transmitted using a data carousel mechanism.

In an alternative embodiment, the PSCMBs 12 are located at a position corresponding to the payload scrambling control information 12' in a transport packet carrying a DVB-MPE datagram, in order to further increase interoperability

of filtering and unscrambling procedures in the set top box STB1. This can be achieved by departing from the DSM-CC datagram section format as follows. Table 5 compares the syntaxes of this alternative datagram section format and the DVB-MPE datagram section format.

Alternative datagram section	DVB-MPE datagram section	No.of bits
table_id	Table_id	8
section_syntax_indicator	section_syntax_indicator	1
private_indicator	private_indicator	1
Reserved	reserved	2
dsmcc_section_length	section_length	12
table_id_extension	MAC_address_6	8
table_id_extension	MAC_address_5	8
reserved	reserved	2
payload_scrambling_control	payload_scrambling_control	2
version_number (bit2, bit1)	address_scrambling_control	2
version_number (bit0)	LLC_snap_flag	1
current_next_indicator	current_next_indicator	8
section_number	section_number	8
Address/ Filtering Field	MAC_address_3	8
Address/ Filtering Field	MAC_address_2	8
Address/ Filtering Field	MAC_address_1	8
Address/ Filtering Field	MAC_address_0	8

Table 5

In this embodiment, the version number is encoded using three bits (bit0, bit1, bit2). The payload scrambling control bits 12 are encoded in two bits in a location corresponding to that of bit4 and bit3 of the version number as defined in the DSM-CC datagram_section format shown in Table 4. As shown in Table 5, both the PSCBs 12, 12' and the filtering information 14, 14' are located at the same position within the transport packets 7, 16.

15

The Digi-TV centre 5 then groups related transport packets together and broadcasts the group or groups to individual set top boxes STB1, STB2, via the DVB-T network 4. In accordance with the data carousel mechanism, the broadcast of the group of transport packets is repeated at regular intervals. The re-transmission of transport packets continues until the group of transport packets replaced by new data or the data carousel is taken offline.

20

The set top box STB1 is connected to a conventional analogue TV receiver TV1. It will be understood that the DVB-T network 4 broadcasts data to many television receivers illustrated schematically by a further television receiver TV2 associated with a second set top box STB2. The set top boxes STB1, STB2 may also receive group services from a group service provider GSP1 through the DVB-T network 4.

The set top box STB1 is shown in more detail in Figure 3. Digital data from cable, satellite and terrestrial DVB networks are received on inputs 16a, 16b, 16c and are fed to a data parser 17 that streams the received data to a hardware filter 18. The filter 18 filters the incoming data and retrieves only those transport packets 7 that are directed to the set top box STB 1 by matching the filtering information with reference information. In this example, the reference information is the MAC address of the set top box STB 1. If the filtering information and reference information match, then the transport packets 7 are stored in a RAM facility 19. The filter 17 then notifies a processor 20 of the arrival of the transport packet 7 using an interrupt signal. The processor 20 retrieves the transport packet 7 and either stores the data on a hard disk 21 or outputs the data to TV output circuitry 22 for display in real time. The output circuitry 22 includes a D/A converter and a UHF modulator to provide signals on line 23 for supply to a conventional antenna socket of the analogue TV receiver TV1. A remote controller 24 controls operation of the processor 18 via a wireless link 25, such as an infra-red link, through a transducer 26.

The set top box STB1 can be used to receive, record and feed TV broadcasts to the analogue TV receiver TV1 and the remote controller 24 is used to control channel selection for both real time display and recording on the hard disk 21. Additionally, the set top box STB1 may also run an e-mail client, such as a web browser, to receive e-mails downloaded through the DVB-T network 4, for display on the analogue TV receiver TV1.

The filter 18 automatically filters incoming data by matching all or part of its internal address, such as an IP address for receiving TCP/IP or UDP/IP packets,

MAC address or a filtering address or other associated filtering information to the filtering information 14 in an incoming transport packet 11. The filtering is performed using hardware to compare the filtering field in the incoming data to reference filtering information stored in a register, e.g. the MAC address of the set top box STB1. In this manner, only those messages intended for a user of the analogue TV receiver 7 are processed, the remaining messages being discarded.

Alternatively, the filtering process may be performed using a software filter. In such an embodiment, the hardware filter 18 would be omitted, so that incoming data received on inputs 16a, 16b, 16c would be streamed by the data parser 17 directly to the processor 20. The processor 20 then compares the filtering information of the incoming transport packet to reference filtering information. In this case the reference filtering information, e.g. the MAC address for the set top box STB1, is stored in a non-volatile memory 27 associated with the processor 20. If the filtering information and reference filtering information match, the data packet is processed, either being stored on the hard disk 21 or displayed using the output circuitry 22. If there is no match, the transport packet 7 is discarded.

In this manner, where the MMS is intended for set top box STB1 only, as depicted in Figure 1, the transport packet 7 addressed to set top box STB1 will be filtered, stored and output to analogue TV receiver TV1 as required. However, the transport packet 7 will be discarded by a similar filtering process in set top box STB2.

The invention has been described by way of an example and is not limited to data packets encapsulated using the DSM-CC datagram section format. Where this format is used, the table_id need not be a specifically defined value relating to downloaded MMS messages. The table_id 0x3C, for "downloadDataMessage", could also be used with appropriate changes to existing standards, in terms of redefining the data structure associated with this table id. Alternatively, the table_id could be defined with a value within the range 0x40 to 0xFF. According to the datagram section format, these values are presently reserved for a user's private definitions, but one table_id value could be selected and defined for this purpose, e.g. 0x40.

As noted above, other information may be used in place of the address information for filtering purposes. While it is preferable for the filtering field to have a size of four bytes and to be located in the transport packet as described, for compatibility
5 with DVB-MPE systems, the filtering field may be configured according to the application and the location of these fields without departing from the scope of the invention.

The payload scrambling information can be encoded in other fields of the transport
10 packet and DSM-CC datagram section and, although it is preferable that its inclusion within the transport packet, i.e. its location and format, is not incompatible with the DSM_CC datagram section format, this is not a limitation on the scope of the invention as is shown by way of example by the second embodiment described above.

Claims

1. A method of transmitting data in a digital broadband communication network comprising:
 - 5 encapsulating the data according to a first protocol to produce a data packet;
 - mapping the data packet onto a transport packet;
 - encoding filtering information in a filtering field included in the transport packet; and
 - repeatedly transmitting the transport packet using a data carousel
- 10 mechanism.
2. A method according to claim 1, wherein the filtering information is a part or whole of an address associated with one or more data receiving devices.
- 15 3. A method according to claim 2, wherein the address is an IP or MAC address.
4. A method according to claim 1, 2, or 3, wherein the data packet is mapped onto an MPEG-2 transport packet.
- 20 5. A method according to any one of the preceding claims, wherein the data is an MMS message and is encapsulated according to the DSM-CC datagram section format with a table id within the range 0x40 to 0xFF.
- 25 6. A method according to any one of the preceding claims, wherein the first protocol is a DSM-CC protocol and the location and format of the filtering information corresponds to a location and format of filtering information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.
- 30 7. A method according to any preceding claim, wherein the step of mapping the data packet comprises encoding scrambling information indicating a scrambling

control mode of the data packet, said scrambling information being unrelated to a scrambling control mode of the transport packet.

8. A method according to claim 7, wherein the data packet contains reserved bits and the step of mapping the data packet onto the transport packet comprises replacing said reserved bits with the scrambling information.

9. A method according to claim 7, wherein the location and format of the scrambling information corresponds to a location and format of scrambling information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.

10. A method according to claim 8 or 9, wherein the scrambling information comprises a first bit indicating whether or not the data packet has been scrambled, wherein, if the data packet has been scrambled, the second bit indicates a scrambling control mode.

11. A computer program containing program instructions for configuring a processor to perform a method according to any one of claims 1 to 10.

20

12. An apparatus comprising a processor configured to:
receive data from a source;
encapsulate the data to produce a data packet according to a protocol;
map the data packet onto a transport packet;
25 encode filtering information in a filtering field included in the transport packet; and
repeatedly transmit the transport packet using a DVB data carousel mechanism.

30 13. An apparatus according to claim 12, wherein the filtering information is a part or whole of an address associated with one or more data receiving devices.

14. An apparatus according to claim 10, wherein the address is an IP or MAC address.

15. An apparatus according to claim 12, 13 or 14, wherein the processor is configured to map the data packet onto an MPEG-2 transport packet.

16. An apparatus according to any one of the preceding claims, wherein the data is an MMS message and the processor is configured to encapsulate the data according to the DSM-CC datagram section format with a table id within the range 0x40 to 0xFF.

17. An apparatus according to any one of claims 12 to 16, wherein the first protocol is a DSM-CC protocol and the processor is configured to encode the filtering information so that its location and format corresponds to a location and format of filtering information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.

18. An apparatus according to any one of claims 12 to 17, wherein the processor is further configured to encode scrambling information within the transport packet, said scrambling information indicating a scrambling control mode of the data packet unrelated to a scrambling control mode of the transport packet.

19. An apparatus according to claim 18, wherein the data packet contains reserved bits and the processor is configured to encode the scrambling information by replacing said reserved bits with said scrambling information when mapping the data packet onto the transport packet.

20. An apparatus according to claim 18, wherein the processor is configured so that the location and format of the scrambling information in the transport packet corresponds to a location and format of scrambling information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.

21. An apparatus according to claim 19 or 20, wherein the processor is
5 configured to define the scrambling information so that a first bit indicates whether
or not the data packet has been scrambled, and wherein, if the data packet has been
scrambled, a second bit indicates a scrambling control mode.
22. A communication system comprising:
10 an apparatus according to any one of claims 12 to 21;
a DVB communication network; and
one or more receiving devices.
23. A transport packet comprising:
15 a header containing an identifier relating to a data carousel;
a payload comprising data to be transmitted to one or more users of one or
more receiving devices; and
a filtering field containing filtering information relating to said one or more
receiving devices.
20
24. A transport packet according to claim 23, wherein the filtering information is
a part or whole of an address associated with said one or more receiving devices.
25. A transport packet according to claim 23 or 24, further comprising payload
25 scrambling control mode information relating to a scrambling status of the payload
data, said scrambling status being unrelated to a scrambling status of the transport
packet.
26. A transport packet according to claim 25, wherein the payload scrambling
30 control information comprises two bits, the first bit indicating whether or not the
payload has been scrambled and, where said payload has been scrambled, the second
bit indicating one of two scrambling control modes.

27. A method of transmitting data in a digital broadband communication network comprising:

encapsulating the data according to a first protocol to produce a data packet;

mapping the data packet onto a transport packet;

5 incorporating within the transport packet payload scrambling control mode information relating to an encryption status of the data packet mapped onto said transport packet; and

repeatedly transmitting the transport packet using a data carousel mechanism.

10

28. A method according to claim 27, wherein the first protocol is defined by the Digital Storage Media Command and Control standard and the data is encapsulated according to the DSM-CC datagram section format.

15 29. A method according to claim 28, wherein the data is an MMS message and the data packet has a table id within the range 0x40 to 0xFF.

30. A method according to claim 27, 28, or 29, wherein the step of incorporating payload scrambling control information comprises encoding the payload scrambling control information in two bits of the transport packet that correspond to reserved bits of the data packet.

31. A method according to claim 27, wherein a location of the payload scrambling control mode information in the transport packet corresponds to a location of payload scrambling control mode information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.

32. A method according to claim 30 or 31, wherein a first value encoded in a first bit indicates whether or not the payload has been scrambled.

30

33. A method according to claim 32, wherein, if the payload has been scrambled, a second value encoded a second bit indicates a scrambling control mode that has been used.
- 5 34. A method according to any one of claims 27 to 33, wherein the data packet is mapped onto an MPEG-2 transport packet.
35. A computer program containing program instructions for configuring a processor to perform the method of any one of claims 27 to 34.
- 10 36. An apparatus comprising a processor configured to:
receive data from a source;
encapsulate the data according to a first protocol to produce a data packet;
map the data packet onto a transport packet;
15 incorporate within the transport packet payload scrambling control mode information relating to an encryption status of the data packet mapped onto said transport packet; and
repeatedly transmit the transport packet using a data carousel mechanism.
- 20 37. An apparatus according to claim 36, wherein the first protocol is defined by the Digital Storage Media Command and Control standard and the data is encapsulated into the DSM-CC datagram section format.
38. An apparatus according to claim 37, wherein the data is an MMS message
25 and the processor is configured to encapsulate the data packet with a table id within the range 0x40 to 0xFF.
39. An apparatus according to claim 37 or 38, wherein the processor is
configured to incorporate payload scrambling control information by encoding the
30 payload scrambling control information in two bits that correspond to reserved bits of the data packet.

40. An apparatus according to claim 36, wherein a location of the payload scrambling control mode information corresponds to a location of payload scrambling control mode information in a transport packet formed from the same data when encapsulated according to a second protocol, said second protocol being DVB-MPE.
41. An apparatus according to claim 39 or 40, wherein a first value encoded in a first bit indicates whether or not the payload has been scrambled.
42. An apparatus according to claim 41, wherein, if the payload has been scrambled, a second value encoded in a second bit indicates a scrambling control modes that has been used.
43. An apparatus according to any one of claims 36 to 42, wherein the processor is configured to map the data packet onto an MPEG-2 transport packet.
44. A communication system comprising:
an apparatus according to any one of claims 36 to 43;
a DVB communication network; and
one or more receiving devices.
45. A transport packet comprising:
a header containing an identifier relating to a digital data carousel;
a payload comprising data to be transmitted to one or more users of one or more receiving devices; and
a payload scrambling control mode field containing scrambling control mode information, said scrambling control mode information being unrelated to an encryption status of said header.
46. A transport packet according to claim 45, wherein the payload scrambling control mode field comprises two bits, a first value encoded in the first of the two bits indicating whether or not the payload has been scrambled.

47. A transport packet according to claim 46, wherein, if the payload has been scrambled, a second value encoded in the second of the two bits indicates which of two scrambling control modes has been used.
- 5 48. A method of transmitting data in a Digital Video Broadcasting network substantially as described hereinbefore with reference to the accompanying drawings.
- 10 49. An apparatus substantially as hereinbefore described with reference to the accompanying drawings.
50. A communication system substantially as hereinbefore described with reference to the accompanying drawings.

Abstract

Transmission of data using a data carousel

5 A method of transmitting data, such as an MMS message 13, via a DVB network 4 comprises encapsulating the data 13, mapping the resulting data packet onto a transport packet 7, including filtering information 14 and/or payload scrambling control mode information 12 relating to scrambling of the data packet in the transport packet 7 and broadcasting the transport packet 7 using a data carousel to
10 one or more receiving devices STB1. This procedure may be performed by a Digi-TV centre 5. The inclusion of filtering information 14 allows the use of hardware filters 18 for screening data via a data carousel at a receiving device STB1, while the inclusion of payload scrambling control mode information 12 allows any encryption of the transport packet 7 to be limited to the data packet, so that it is not necessary
15 for the receiving device STB1 to decrypt the transport packet 7 before filtering. The filtering information 14 may be part or whole of an address associated with the receiving device STB1, e.g. an IP or MAC address.

THIS PAGE BLANK (USPTO)

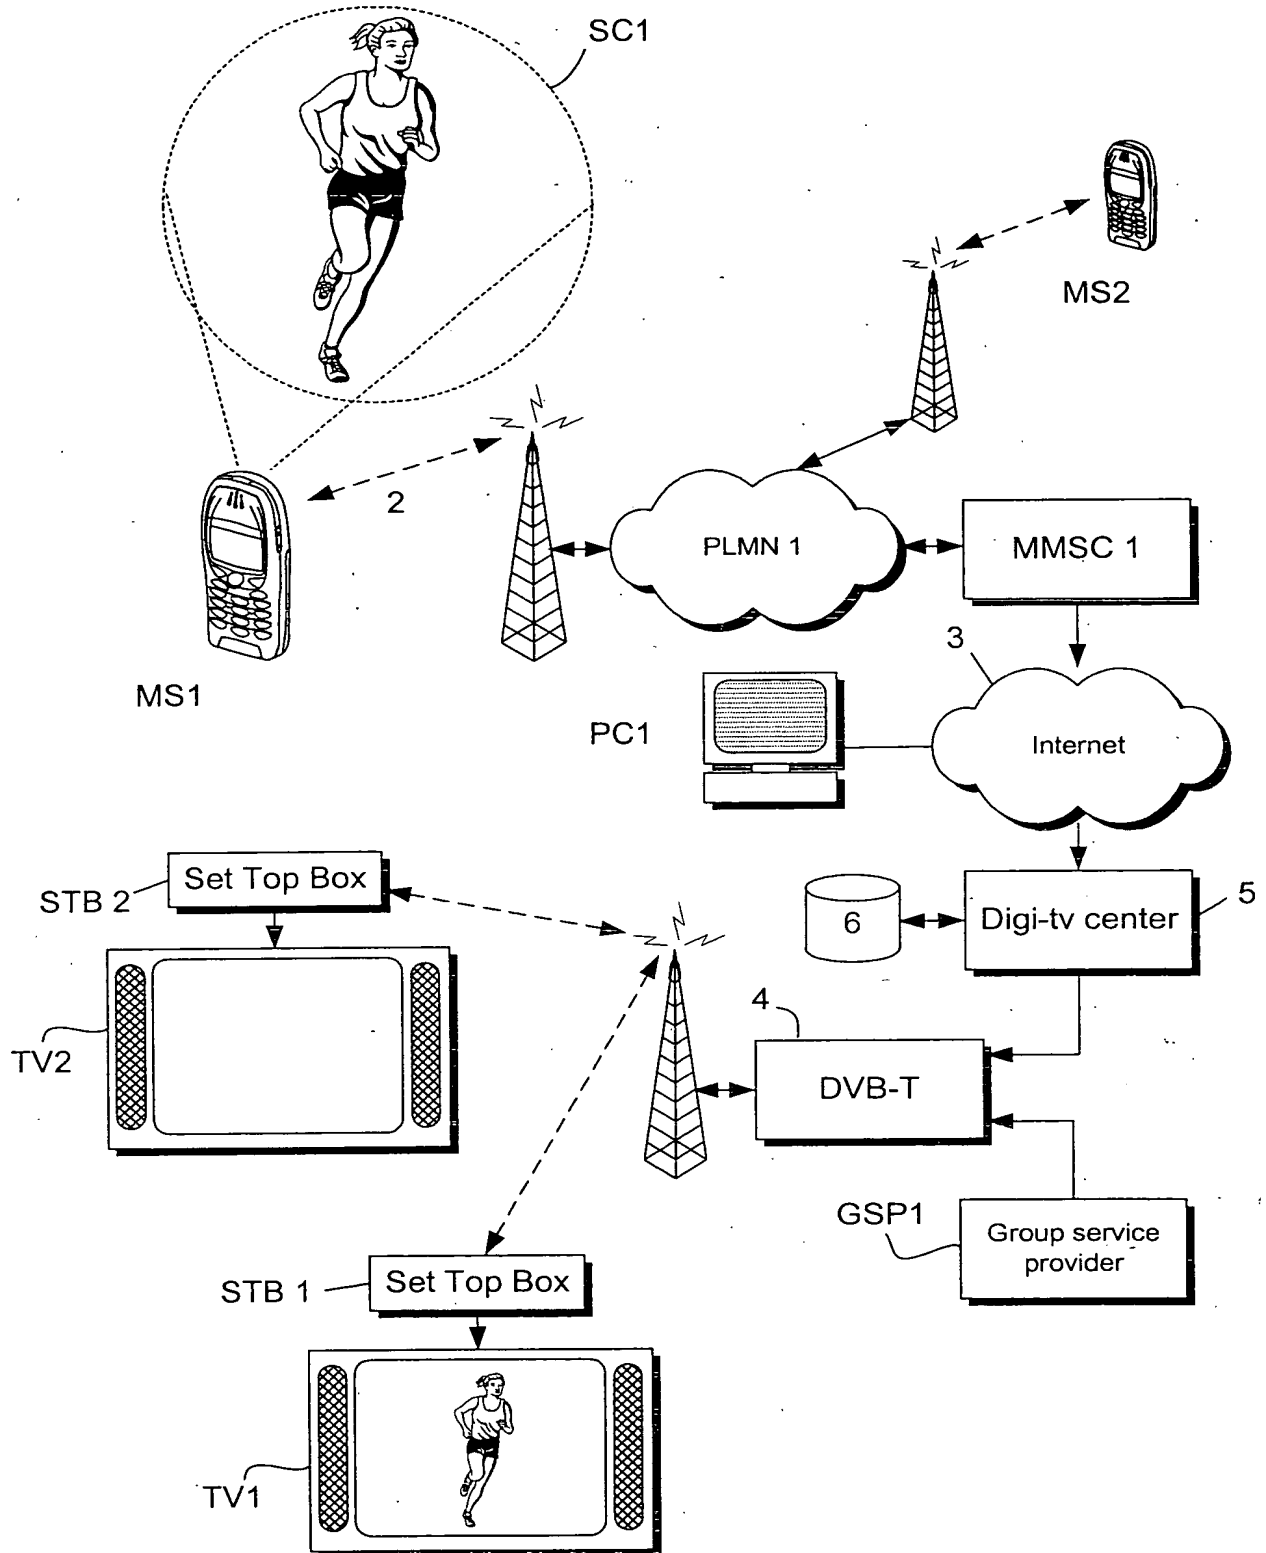


Figure 1

THIS PAGE BLANK (USPTO)

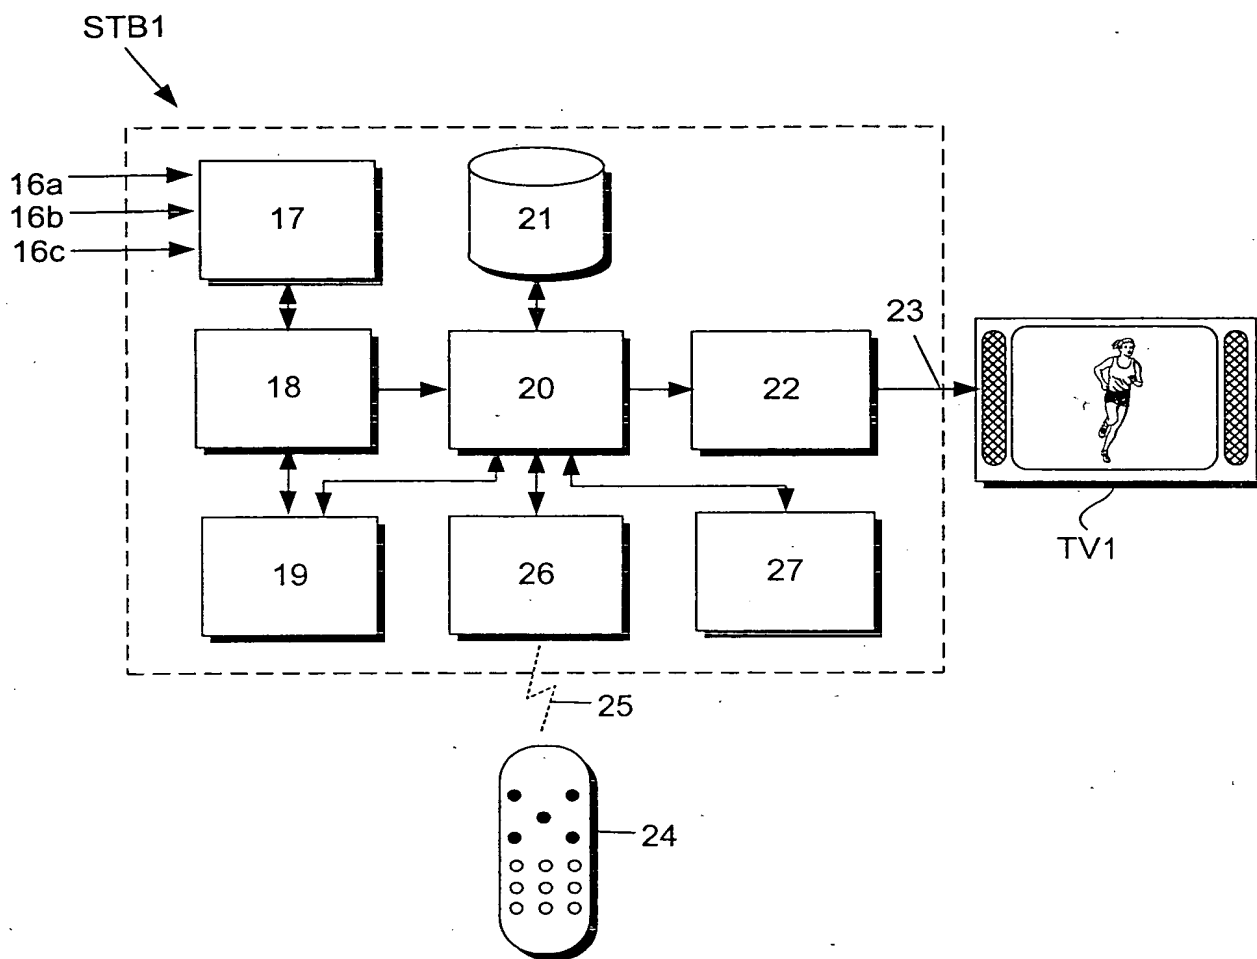


Figure 3

THIS PAGE BLANK (USPTO)

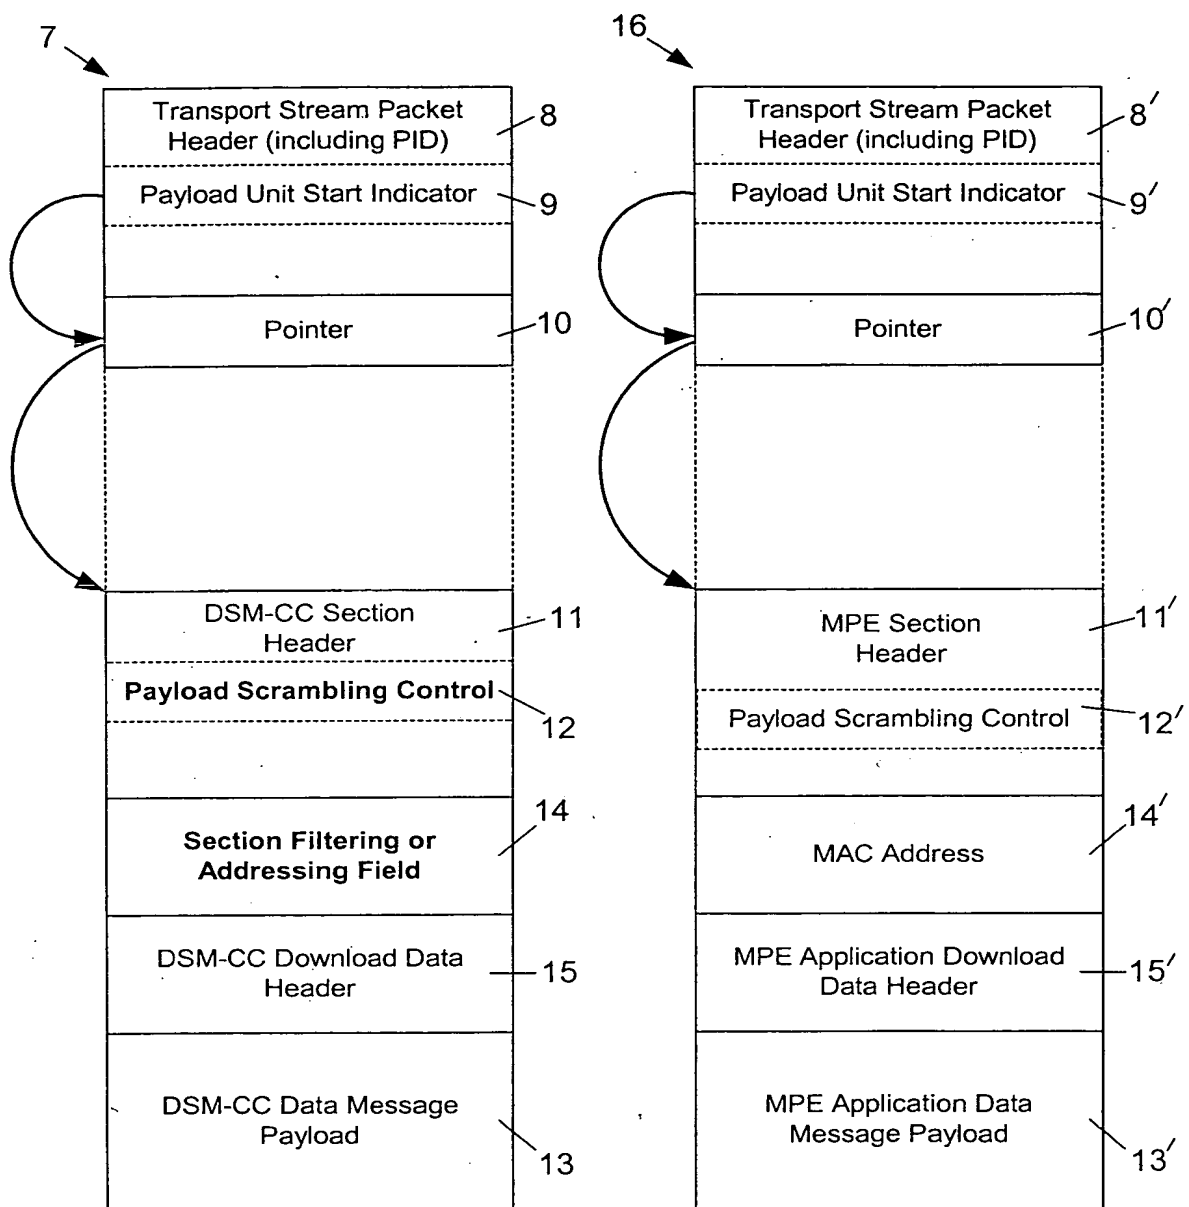


Figure 2

THIS PAGE BLANK (USPTO)